

# AS-4256

## Power Mixer amplifier

Made in  
France



- 🌀 Power : 250W
- 🌀 6 switchable inputs
- 🌀 2-tone chime
- 🌀 Power extension
- 🌀 Easy and quick installation

Mixer amplifier **AS-4256** is provided with 250W and a class D amplifier, offering high efficiency > 92%.

It has 6 switchable inputs, a MUTE command and a OdBu output for an additional amplifier, which allows to increase power of the system.

This mixer amplifier meets numerous sound configurations.



### Features

<b>Inputs</b>	4 MIC / Line 1 digital console 1 music line
<b>Power</b>	250W
<b>Bandwidth</b>	100 - 19 000 Hz
<b>Distortion</b>	< 0,5 %
<b>S/N ratio</b>	> 80 dB
<b>Power supply</b>	110 - 265 VAC
<b>Dimensions</b>	483 x 328 x 44 mm
<b>Colour</b>	Black
<b>Material</b>	Metal
<b>Weight</b>	3,9 kg

### Applications

Public Address system.....




- ▶ Shops
- ▶ Camping sites
- ▶ Education buildings
- ▶ Places of worship
- ▶ Swimming pools
- ▶ Multisports rooms
- ▶ Supermarkets
- ▶ Urban streets

# AS-4256


Power  
Mixer amplifier

## Front view

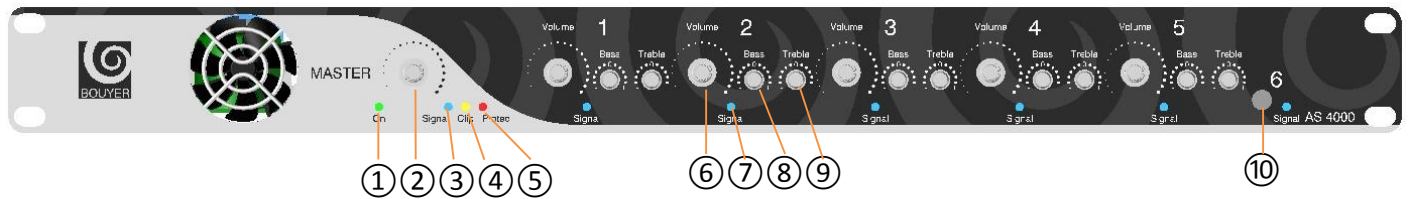

1	Power-on indicator
2	Master adjustment
3	Signal indicator
4	Clip indicator
5	Protec indicator
6	Volume adjustment
7	Signal indicator
8	Bass adjustment
9	Treble adjustment
10	Input 6 on Jack 3,5 mm

## Rear view

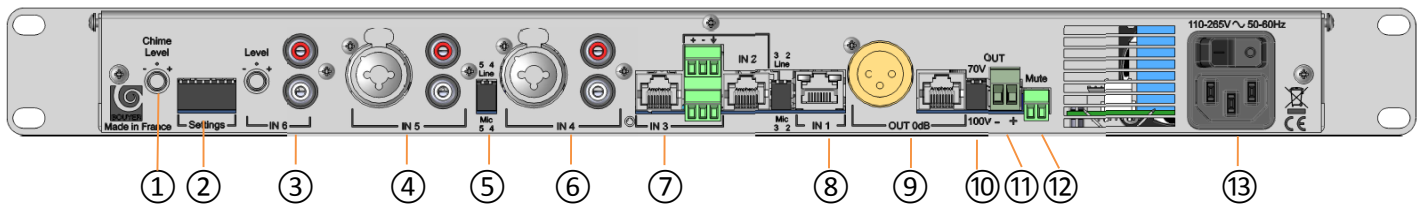

1	Chime level adjustment	
2	Configuration 1-2 : priority mode 3 : chime selection 4 : chime selection 5 : detection step 6-7 : release time	
3	Input 6 (RCA + adjustment)	
4	Input 5 (combo XLR/jack 6,35mm)	
5	Mic/Line selection for inputs 4 and 5 1 : input 4 2 : input 5	
6	Input 4 (combo XLR/jack 6,35mm)	
7	Inputs 2 and 3 (RJ45 + terminal 3 pts) + Mic/Line selection 1 : input 2 2 : input 3	
8	Input 1 (RJ45)	
9	Output 0dBu (XLR + RJ45)	
10	70V/100V selection 1-2 : 70V/100V	
11	100V output	
12	Mute input	
13	Mains socket + start switch	

